

FoamEX

Product Data Sheet

Last updated: January 2025

What is FoamEX?

FoamEX is a specially formulated bitumen additive designed to achieve the required expansion ratio and half-life characteristics of foamed bitumen.

Benefits

- Non-dangerous goods
- Non-toxic
- Non-carcinogenic
- No fumes or odour
- Eco-friendly
- Australian made
- Promotes bitumen foaming properties to meet specifications: AGPT Part 4D, TMR MRTS07C, RMS TS 02752



Physical Properties


Appearance	White/yellow liquid
Density	0.85 t/m ³
Viscosity at 25°C	200 - 600 mPa.s
Flash point	>200°C

Recommended Use

Shelf Life	24 months
Dosage %	0.6% by mass of bitumen
Circulation time prior to foaming bitumen	1 hour
Re-dose time	24 hours after initial addition
Storage	0-50°C Sealed, out of direct sunlight
Safety & Handling	Refer to SDS

It is recommended to test the foaming characteristics of the bitumen and FoamEX prior to use. Machine settings, temperature, and bitumen grade may affect foaming properties.

Time delay effect on FoamEX performance

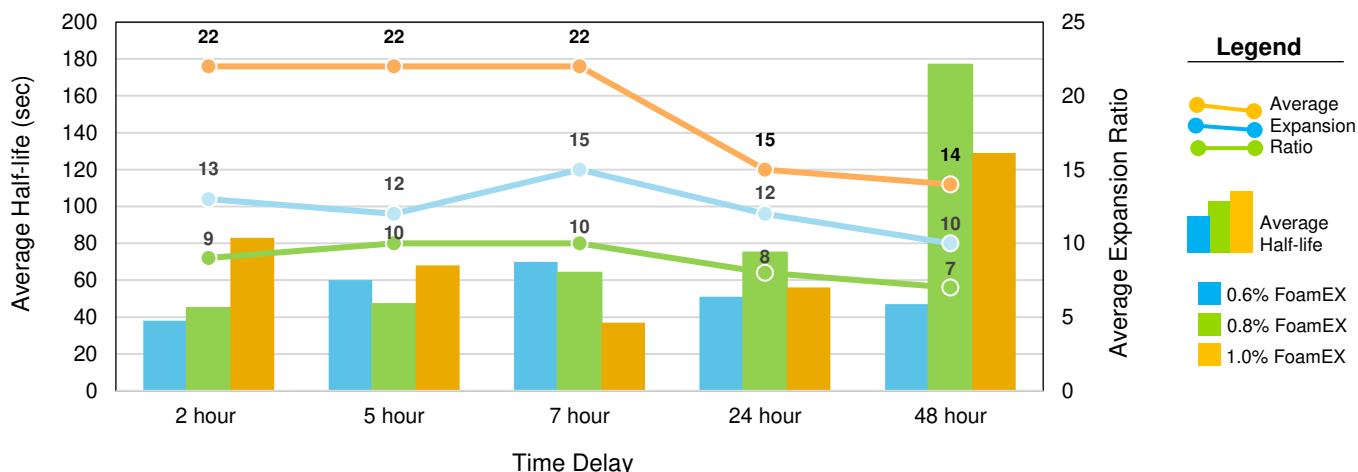

The information contained in this document is, to the best of our knowledge true and accurate, but since the conditions of use are beyond our control, any recommendations or suggestions which may be made are without guarantee and no warranty, expressed or implied, is given. We reserve the right to change this document at any time.

For more information contact: Steve Pittonet
M | 0418 360 493
E | Steve.Pittonet@Downergroup.com